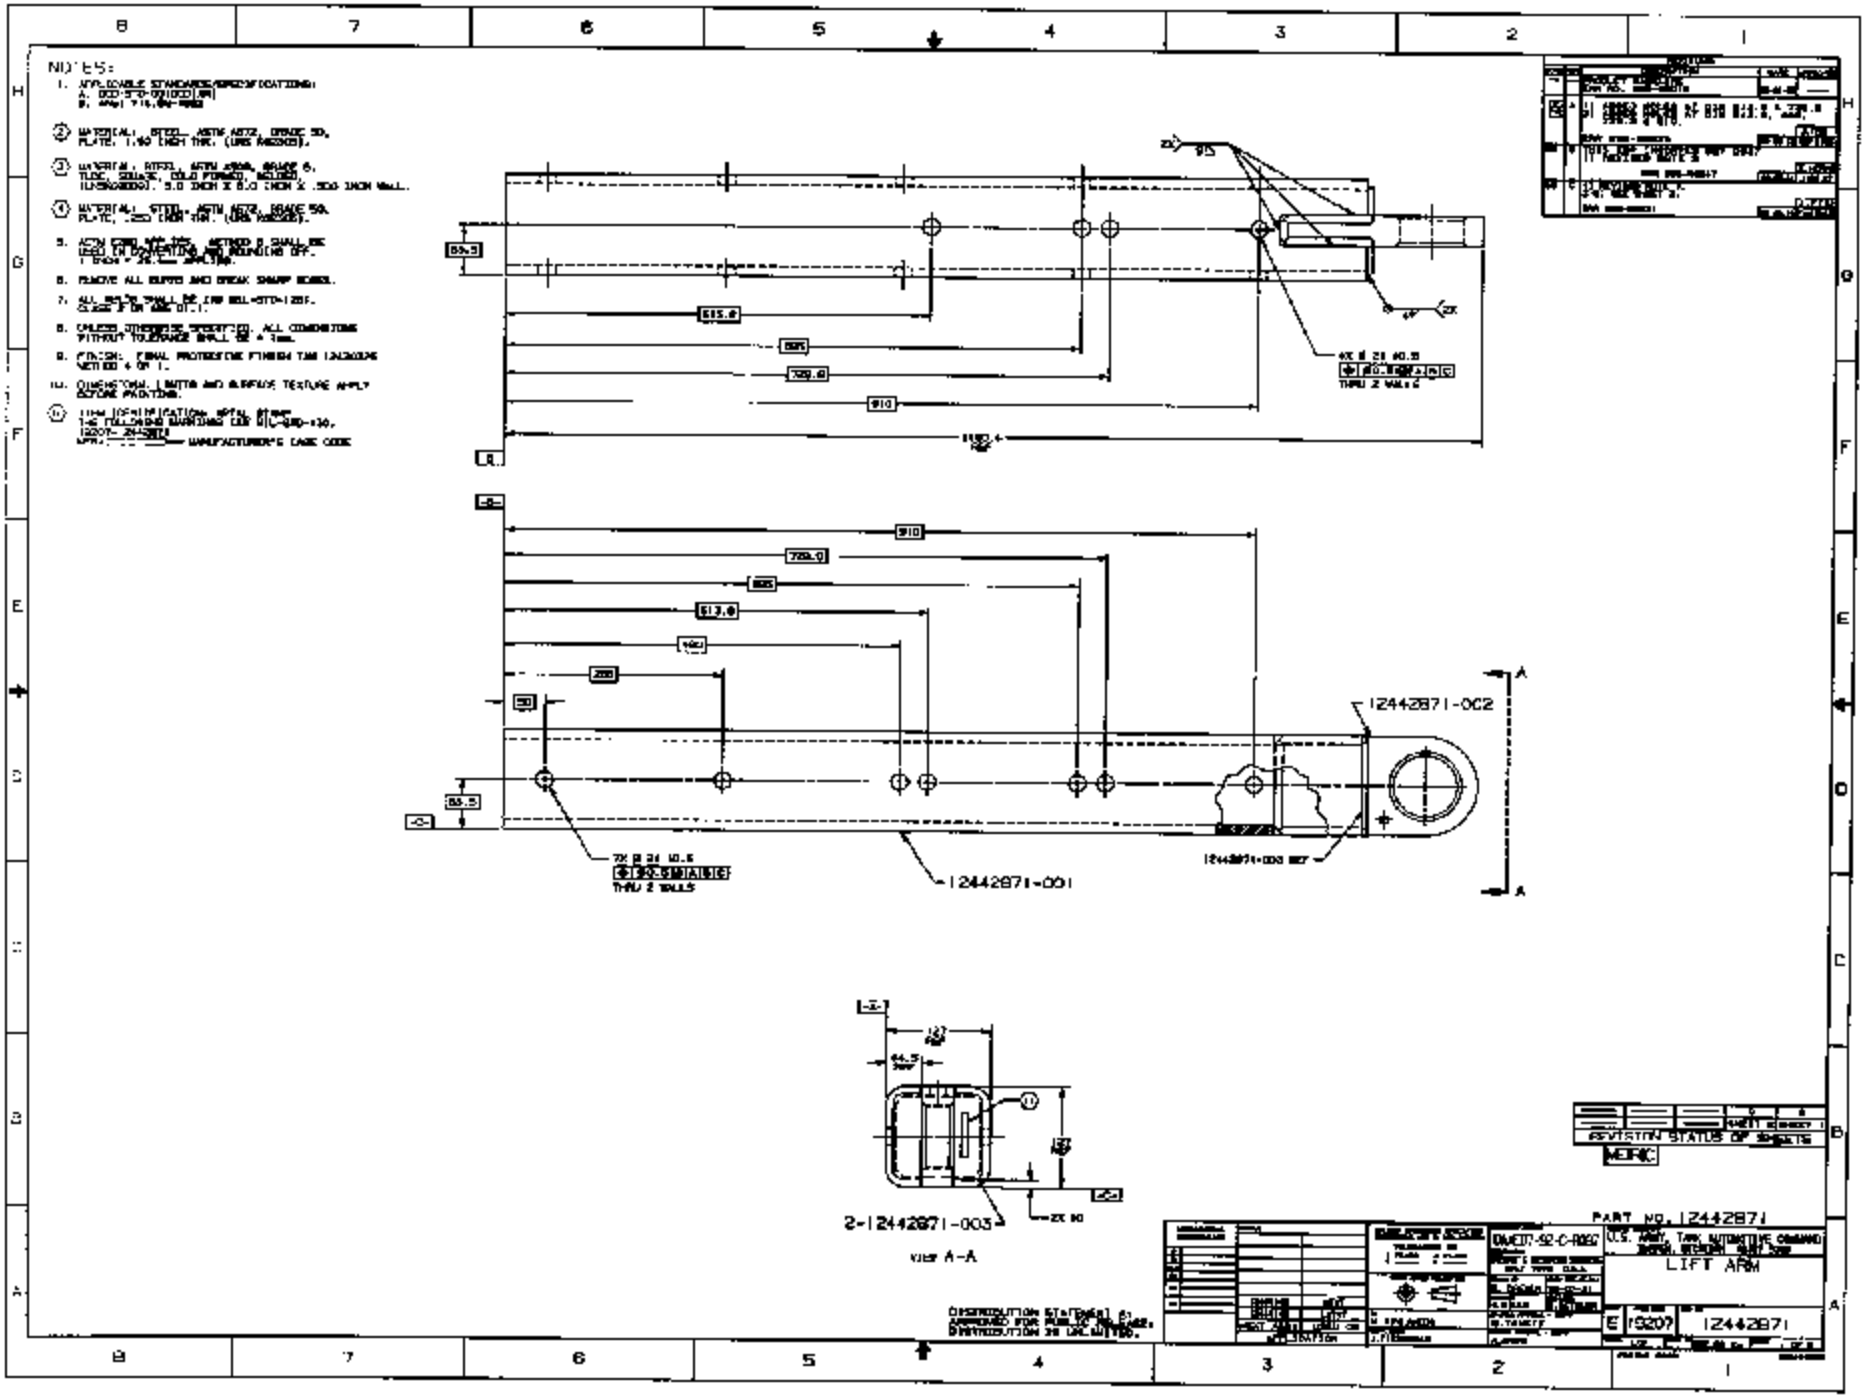
NOTES:
1. APPLICABLE STANDARDS/SPECIFICATIONS:
2. MATERIAL: STEEL, ASTM A572, GRADE 50, PLATE, 1.50 INCH THK. (URS R62305).
3. MATERIAL: STEEL, ASTM A500, GRADE 6, TUBE, SQUARE, COLD FORMED, WELDED, (UNSR00000), 5.0 INCH X 5.0 INCH X .500 INCH WALL.
4. MATERIAL: STEEL, ASTM A572, GRADE 50, PLATE, .250 INCH THK. (URS R62305).
5. ASTM E380 AND 485. METHOD B SHALL BE USED IN CONVERTING AND ROUNDING OFF.
6. REMOVE ALL BURRS AND BREAK SHARP EDGES.
7. ALL WELDS SHALL BE IAW BRL-STD-1201.
8. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS WITHOUT TOLERANCE SHALL BE ± 1mm.
9. FINISH: FINAL PROTECTIVE FINISH IAW 12420206 METHOD 4 OR 1.
10. DIMENSIONAL LIMITS AND SURFACE TEXTURE APPLY BEFORE PAINTING.
11. ITEM IDENTIFICATION: METAL STAMP THE FOLLOWING MARKINGS LOW BIL-SBD-130, 12207-12442871
MANUFACTURER'S CAGE CODE
12442871-002
12442871-001
2-12442871-003
VIEW A-A
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED.
REVISION STATUS OF SHEETS
METRIC
PART NO. 12442871
U.S. ARMY, TANK AUTOMOTIVE COMMAND
LIFT ARM
E 19207 12442871